


BETTER CARE. BETTER COMFORT. BETTER SOLUTIONS

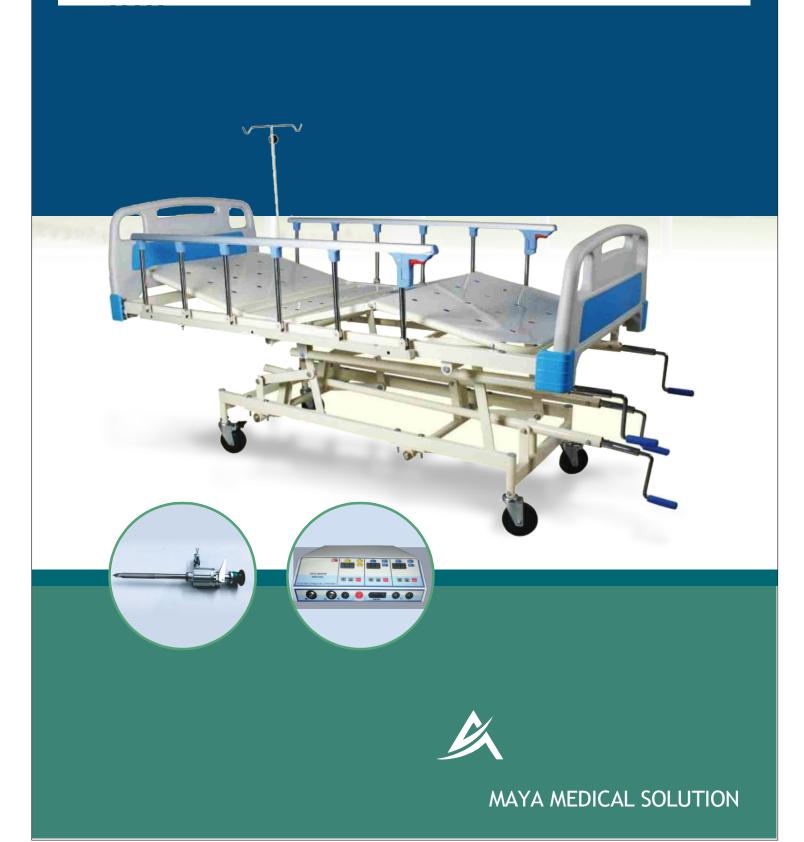

Torador, Randy Ray, do, Drood, Jpron, Odraino, Dod Onodo, do.

HOSPITAL BEDS

ICU MECHANICAL BED

with ABS Panel & Aluminium Collapsible Side Railing

ATMS-01



ICU Mechanical Bed with ABS Panel & Aluminium Collapsible Side Railing

- Frame Work
- e Work : Rectangular MS/CRC Tube /Top : 4 Section Top made by perforated MS/CRC Sheet

ABS molded head and foot bows

- Sheet/Top
- Positions :
- Panel

٠

٠

- Side Railing
- Side valuing
- ng : Aluminium Collapsible safety side railings (Option for SS Railing)
- I.V. Rod : 4 Locations position

5

- Stand on : Bed mounted on 125mm Dia Caster with break
- Size : L=210 cms, W=90 cms, H=50-70 cms
 - Finish : Pre-Treated and Epoxy Powder Coated (Ivory or required color)
- Attachments : 4 Fold Mattress and one Telescopic I.V. Rod in SS Rod with MS Pipe Fittings.

Back Rest, Knee Rest, TB/RTB & Hi-Lo position by Screw System

ICU MECHANICAL BED

with SS Panel & SS Up-Down Railing



ATMS-02



ICU Mechanical Bed with SS Panel & SS Up & Down Railing

- Frame Work .
- Rectangular MS/CRC Tube 1
- Sheet/Top ٠
- 4 Section Top made by perforated MS/CRC Sheet 1
- Positions
- Panel
 - : Side Railing :
- I.V. Rod
- SS Pipe safety side railings (Collapsible/Up & Down) 1 4 Locations position

Back Rest, Knee Rest, TB/RTB & Hi-Lo position by Screw System

Laminated Wooden Panel fitted with SS Pipe in head and foot bows

3

- Stand on Bed mounted on 125mm Dia Caster with break :
- : L=210 cms, W=90 cms, H=50-70 cms Size
 - Finish Pre-Treated and Epoxy Powder Coated (Ivory or required color) :
- 4 Fold Mattress and one Telescopic I.V. Rod in SS Rod with MS Pipe Fittings. Attachments 1

HOSPITAL BEDS

ICU ELECTRIC BED

with ABS Panel & ABS Tuck away Railing

ATMS-03



ICU Electric Bed with ABS Panel & ABS Tuck Away Side Railing

- Frame Work
 - ork : Rectangular MS/CRC Tube
 - Sheet/Top : 4 Section Top made by perforated MS/CRC Sheet
- Positions : Back Rest, Knee Rest, TB/RTB & Hi-Lo position obtained by Electric Actuator operated by Hand Remote System
- Panel
- el : ABS molded head and foot bows Railing : ABS molded tuck away safety side railings

4 Locations position

- Side Railing
 I.V. Rod
- 1.v. Kou
- Stand on :
- Size : L=210 cms, W=90 cms, H=50-70 cms

:

- Finish : Pre-Treated and Epoxy Powder Coated (Ivory or required color)
- Attachments : 4 Fold Mattress and one Telescopic I.V. Rod in SS Rod with MS Pipe Fittings.

Bed mounted on 125mm Dia Caster with Central Braking System



ICU Electric Bed with Aluminium Collapsible Side Railing

- Frame Work
- Rectangular MS/CRC Tube 20
- Sheet/Top .
- ÷ 4 Section Top made by perforated MS/CRC Sheet

Aluminium Collapsible safety side railings

- Positions ٠

ABS molded head and foot bows

- Back Rest, Knee Rest, TB/RTB & Hi-Lo position obtained by Electric Actuator : operated by Hand Remote System
- Panel ٠
- Side Railing
- 32 I.V. Rod 4 Locations position :

:

- Stand on 20 Bed mounted on 125mm Dia Caster with brake
- L=210 cms, W=90 cms, H=50-70 cms Size 1
 - Pre-Treated and Epoxy Powder Coated (Ivory or required color) Finish 22
 - Attachments 1 4 Fold Mattress and one Telescopic I.V. Rod in SS Rod with MS Pipe Fittings.

HOSPITAL BEDS

FOWLER BED DELUXE

with ABS Panel & Aluminium Collapsible Side Railing

ATMS-05



Fowler Bed Deluxe (ABS Panel)

:

1

.

:

•

Additional

- Frame Work
- Sheet/Top \$
- Positions .
- Panel

.

- Side Railing .
- I.V. Rod
- : 4 Locations (position only, IV Stand additional) 3
- Leg Stand on
- Size
- Finish
- Pre-Treated and Epoxy Powder Coated (Ivory or required color) : 1 4 fold Mattress, Aluminium Railing and I.V. Rod

L=198 cms, W=90 cms, H=60 cms

ABS molded Panel in head and foot bows

4 Section Top made by perforated MS/CRC Sheet

Back & Knee Rest section maneuvered by two separate Screw from foot end

Bed mounted on 125mm Dia Caster with Central Braking System

Rectangular MS/CRC Tube

- Additional options



Back & Knee Rest section maneuvered by two separate Screw from foot end

Laminated Wooden Panel fitted with SS Pipe in head and foot bows

Bed mounted on 125mm Dia Caster with Central Braking System

Fowler Bed Deluxe (SS Panel)

 Frame Work : Rectangular MS/CRC Tube 4 Section Top made by perforated MS/CRC Sheet

:

:

5

Sheet/Top

٠

- Positions
- 2 :
- Panel
- Side Railing I.V. Rod
- Additional : 4 Locations (position only, IV Stand additional) :
- Leg Stand on
- Size .
- Finish
- Additional options
- Pre-Treated and Epoxy Powder Coated (Ivory or required color) :

L=198 cms, W=90 cms, H=60 cms

4 fold Mattress, SS Railing and I.V. Rod 1

HOSPITAL BEDS FOWLER BED DELUXE with SS Panel

ATMS-07

ATMS-08



Semi Fowler Bed Deluxe (SS Panel)

:

2

5

:

:

1

2

:

Additional

- Frame Work
- Sheet/Top
- Positions
- Panel
- Side Railing
- I.V. Rod
- Leg Stand on
- Size
- JILC
- Finish
- Pre-Treated and Epoxy Powder Coated (Ivory or required color) 2Fold Mattress, SS Side Railing, I.V. Rod and Wheel Castor.

Bed stand on PVC stumps (Wheel Caster Additional)

Back & Knee Rest section maneuvered by Screw from foot end

Laminated Wooden Panel fitted with SS Pipe in head and foot bows

2 Section Top made by perforated MS/CRC Sheet

: 4 Locations (position only, IV Stand additional)

L=206 cms, W=90 cms, H=60 cms

Rectangular MS/CRC Tube

Additional options :

SEMI FOWLER BED DELUXE

with ABS Panel



Semi Fowler Bed Deluxe (ABS Panel)

5

:

1

÷.

:

:

1

Additional

- Frame Work
- Sheet/Top
- Positions
- Panel
- Side Railing
- I.V. Rod
- Leg Stand on
- Size
- Finish
- L = 198 cms, W= 90 cms, H= 60 cms
 Pre-Treated and Epoxy Powder Coated (Ivory or required color)

Bed stand on PVC stumps (Wheel Caster Additional)

2 Section Top made by perforated MS/CRC Sheet

ABS molded Panel in head and foot bows

4 Locations (position only, IV Stand additional)

Back & Knee Rest section maneuvered by Screw Handle from foot end

Additional options : 2 fold Mattress, SS or MS pipe Side Railings (Up & Down), I.V. Rod and Wheel Castor

Rectangular MS/CRC Tube

SEMI FOWLER BED GENERAL

with Indian Panel



ATMS-09

NST - 10

Semi Fowler Bed (General-Indian Panel)

1

1

2

2

- Frame Work : Rectangular MS/CRC Tube
- 2 Section Top made by perforated MS/CRC Sheet Sheet/Top 2
- Positions
- Panel
- Side Railing
- I.V. Rod
- Leg Stand on
- - Size : L=198 cms, W=90 cms, H=60 cms Finish

Additional

Pre-Treated and Epoxy Powder Coated (Ivory or required color) :

4 Locations (position only, IV Stand additional)

: Indian Panel in head and foot bows

Bed stand on PVC stumps

Additional options 2 fold Mattress, SS or MS pipe Side Railings (Up & Down), I.V. Rod and Wheel Castor 1

Back & Knee Rest section maneuvered by Screw Handle from foot end

PEDIATRIC BED

(Indian Panel in MS Pipe)





Pediatric Bed (Indian Panel in MS Pipe)

:

:

:

- Frame Work .
 - Sheet/Top Positions
 - :
- Panel .
- Single Section perforated MS/CRC Sheet Top Plane

Rectangular MS/CRC Tube

- Tabular head and foot bows of equal height with vertical tube support on PVC Stumps :
- Side Railing .
 - Drop Down Safety Side Railings of MS Tube :

: L=198 cms, W=90 cms, H=60 cms

- I.V. Rod 2 Locations (position only, IV Stand additional) :
- Leg Stand on : Tabular Panel Supported on PVC Stumps.
- Size
- Finish
- Additional options
- Plane Mattress / I.V. Rod /Wheel Castor

Pre-Treated and Epoxy Powder Coated (Ivory or required color)

HOSPITAL BEDS **PLAIN BED-GENERAL** with SS Panel

ATMS-11





Plain Bed - General

- Frame Work
- Sheet/Top
- Positions
- Panel
- Side Railing
- I.V. Rod
- Leg Stand on
- Size
- Finish
- Additional options

- Rectangular MS/CRC Tube :
- Single Section perforated MS/CRC Sheet Top :
 - Plain Back Rest Section maneuvered by crank mechanism from foot end :
- ÷ Tabular head and foot bows of unequal height with vertical tube support on PVC Stumps
- Drop Down Safety Side Railings of MS Tube :
- 2 Locations (position only, IV Stand additional) :
- : Tabular Panel Supported on PVC Stumps.
- : L=198 cms, W=90 cms, H=60 cms
 - : Pre-Treated and Epoxy Powder Coated (Ivory or required color)
- : Plain Mattress / I.V. Rod / Wheel Castor

ATTENDED BED

ATMS-12A

12 A - Attended Bed without Mattress

12 B - Attended Bed with Mattress

- Frame Work : Rectangular MS/CRC Tube
- Sheet/Top Single Section perforated MS/CRC Sheet Top :
- Positions 1

.

- Plane : Leg fitted with PVC Stumps. Leg Stand on
- Size : L=180 cms, W=60 cms, H=46 cms
- Finish : Pre-Treated and Epoxy Powder Coated (Ivory or required color)
- Additional options -
- Plane Mattress / 5 cm Foam padded top covered with Rexene

ATMS-12B



HOSPITAL BEDSIDE FURNITURES

TELESCOPIC I.V ROD

- Type : Telescopic
- Stand : SS Rod fitted with MS Pipe Powder Coated



BEDSIDE LOCKER GENERAL

Bed side Locker (General) (16"L x 16" W x 32" H)

ATMS-17

ATMS-19

- Tubular pipe construction fitted PVC stumps assembled to MS cupboard.
- Stainless steel top.
- Epoxy Powder Coated.

BEDSIDE LOCKER DELUXE

- Bed Side Locker (Deluxe) (16"Lx 16"W x 32"H)
- Locker machine pressed from 20 SWG CRCA Sheet with all three sides closed, having one box & a drawer.
- Epoxy Powder Coated
- Also Available in CRCA Sheet in 3 Self with SS top. Mounted on two 5cms dis swiveling castors/ PVC stumps.





OVER BED TABLE (Adjustable)

- Rectangular frame work with mounted on 5 cms casters.
- 30"x16" laminated top adjustable by gear handle.
- Pre-treated and Epoxy Powder Coated.



OVER BED TROLLEY

- Rectangular frame work with mounted on 5 cms casters.
- 30"x16" laminated wooden top.
- Pre-treated and Epoxy Powder Coated.





BEDSIDE SCREEN 3 FOLD

ATMS-22

- Bed Side Screen 3 Fold/Panel
- Size 66"H x 96"L
- Tabular Frame Work with Curtains,
- Mounted on 5cms Caster.
- Epoxy Powder Coated.

SALINE AND I.V. STAND

- M.S. Tubular Pipe.
- Five Legs based with 5 cms Castors.
- S.S. adjustable Rod from 137 cms to 240 cms with hook.
- Epoxy Powder Coated.
- Also available in SS outer Pipe and Rod.





FOOT STEP (Single/Double)

- M.S. Tubular legs fitted with PVC Stump.
- M.S. Top

(Top also available with rubber mat with aluminium beading.)

Size : Foot Step Single: 18"Lx9"Wx9"H

Foot Step Double : 18"Lx 18"W x 18"H

12

HOSPITAL BEDSIDE FURNITURES

PATIENT REVOLVING STOOL

- MS Tubular Legs fitted with PVC stump
- Foot ring support,
- 18 to 27 inches adjustable heights
- SS Top through screw/ Cushioned Top.
- Epoxy Powder Coated.
- Also available in SS Leg with Top









GENERAL STOOLS

- Size 12"Lx12"Wx 20"H
- Tabular Frame Work PVC Stump.
- Top CRC Sheet duly doubled press bent

ATMS-27B

Double Bowl

Pre treated Epoxy Powder Coated.
 Also available in SS Leg with Top

BASIN STAND / BOWL STAND

- S.S. Tubular frame mounted on 5 cm dia castors with two / one SS Basin.
- Also available in M.S. Tubular frame.

ATMS-28A General Table



ATMS-28B U Cut Table



HOSPITAL EXAMINATION TABLE

- Overall Size: 72"Lx 24"W x 32"H
- MS Tubular frame work mounted on PVC Stumps
- Adjustable Back Rest by hand lever, 2 section top
- Epoxy Powder coated finish
- Available in U Cut (NST-28B)



INSTRUMENT TROLLY

- Available in 2 Shelves and 3 shelves with 3 side railings
- Size 60x46x81 cms or 76x46x81 cms or 90x60x81 cms
- Frame work of CRC tube mounted on 7.5 cms castor.
- Also available in SS frame & SS Shelf.





ATMS-29A MS Frame-SS Shelf



MAYO'S TROLLEY

- SS Tray Size 56L x 40W cms
- Rectangular CRC Tube mounted on 5 cms castor.
- Height adjustable by side knob.
- Pre-treated and epoxy powder coated finish.
- Also Available in SS frame.
- · Also available in fixed tray on double stand

MEDICINE TROLLEY

- Available in 2 SS Shelves with 4 drawer & 3 side railing on top.
- Size 76x46x81cms.
- Frame work of CRC tube mounted on castor.
- Also available in SS frame with SS top.





LINEN CHANGE TROLLEY

- MS Tabular frame mounted on 10 cms dia castor.
- Available in 3 shelf with one big ane one small plastic bin.
- Also available in 3 shelf with two big canvas bin attached with frame on both side.
- Epoxy powder coated finish.

HOSPITAL TROLLY

CRASH CART TROLLEY

- SS pipe frames
- Size : 940mm L x 490mmW x 1535mm H
- Six removal bins and two polystrene storage unit with three drawers.
- 3 Shelves
- 125mm dia castor.
 - Also available in MS tabular frame with cylinder trolley





DRESSING TROLLEY

- M.S. Tubular frame.
- Size: 76cm Lx 46cmW x 81cm H
- S.S. shelves with railing and 10 cms castor with bowl and bucket

ATMS-33

- Epoxy Powder coated
- · Also available in SS pipe.
- Also available with 2 SS tray and 2 plastic bins

BABY CRADLE

- M.S. Tubular legs fitted with PVC Stump.
- Woremesh hanging cradle
- Size: 36"x15"x39"
- Pre-treated & Epoxy Powder coated (NST-35A)
- Available in SS pipe with fixed mattress. (NST-35B)
- Available with Caster







ATMS-39



EMERGENCY & RECOVERY TROLLEY (HYDRAULIC)

- Size : 210L x 65W x65 to 95H cms.
- Safety side railing, IV Rod, Storage Tray, Cylinder cage, Removal X-Ray Cassettes, Adjustable Height.

Trendlenburg / Reverse Trendlenburg. 15cms dia caster.

Pre-treated & Epoxy Powder Coated.

FOLDING STRETCHER (CANVAS)

- Size : 213Lx 56W x 15H cms.
- MS/Aluminium poles, folding.



STRETCHER TROLLEY

- Size : 213L x 56W x 81H cms
- Frame work of CRC tube mounted on 15cms Caster
- Removable Stretcher top with chrome plated handle.
- Pre-treated and Epoxy Powder coated finish without mattress.
- Also available in SS pipe and sheet. Option for IV Rod

Also available in MS Tube with Canvas Top



HOSPITAL LABOUR TABLE

LABOUR TABLE TELESCOPIC

- Three Sectional Stainless Steel top, back rest adjustable by Ratchet
- Middle section with "U" cut, leg section can slide under main frame
- Trendlenburg position achieved with Pneumatic pump system
- Provided with head & side safety rails, S.S. Hand Grips
- Three sectional mattress, a pair of Lithotomy Roads with straps/cruches
- Sliding S.S. Douche Tray
- Four Rubber stumps fitted on legs
- Size : 187L x 96W x 80H cms





DELIVERY TABLE (3 SECTION TOP)

- Overall Size : 180L x 60W x 46H cms
- Framework made of Stainless Steel
- Back rest section adjustable on Ratchet / Lever
- Legs fitted with PVC Stumps
- 5 cms foam cushioned top covered with rexine
- · Adjustable lithotomy poles with straps
- Finish : Epoxy Powder Coated

Obstetric Bed Telescopic

- Approx. size Body section 1000 (L) x 800 (W) x 750 (H) mm, Leg Section - 900 (L) mm
- Bed labor and delivery made in 2 section, body section with legs mounted on tips, Leg section swivel castors with brakes
- Leg section can be completely recessed under the body section
- Supports for legs holders with solid mechanism to fix leg holders at requested height & width
- Filled mattress-pad and cover mattress pad in 2 sections
- Supplied with 2 knee crutches adjustable in height & width knockdown construction
- Epoxy powdered coated finish.





OTTable : Electric-Batterry-Manual Operations

This Table equipped with a large translucent sliding table top providing Laparoscopy and C-ARM function without patient reversing. This Surgical Table is powered by either Electric Power System or Internal Battery or Manually by Screw Handle.

Features :

- · Specialized for bariatric, cardiology, orthopaedic, neurology, laparoscopy and other surgery.
- Offering full imaging facility from heart to toes by means of C-ARM access
- Table top longitudinal slide feature, there is no need to reverse patient to achieve full body fluoroscopic procedures.
- Smooth function of Table (i.e. High-Low, Trendelenburg, Lateral Tilt, Flex-Reflex, Chair, Longitudinal Top) can be achieved by using the corded handset.
- Base and Column covered with 304G Stainless Steel Sheet to ensure high durability hygiene for Operation room.
- Interchangeable Head and Leg Section.
- · Inbuilt Battery enable to run table in Emergency.

TECHNICAL SPECIFICATION

| Top Dimension | L2150 x W 500 x |
|-----------------------------|------------------|
| Height adjustment | 750 mm ~ 1050 mm |
| Kidney Elevator | 120 mm |
| Lateral Tilt | +20°/-20° |
| Trendelenburg | +25°/-25° |
| Back Section | 90°/-40° |
| Head & Leg Section | 90°/-90° |
| Power Supply | 24V DC |
| Battery Backup | up to 3 Hours |
| Permissible Weight Capacity | 200 Kg |

HOSPITAL OT TABLE

OPERATION TABLE - ELECTRIC



OT Table : Electric

The NST-46B offers effective solutions for the widest variety of requirements in the OR. Patients benefit from superb positioning comfort and easily accessed with corded handset. Developed with numerous new safety features, the new table is straightforward to use in all surgical disciplines. A wide range of patient positions makes this operating table universal.

Features:

- Specialized for bariatric, cardiology, orthopaedic, neurology, laparoscopy and other surgery.
- · Offering full imaging facility from heart to toes by means of C-ARM access
- Table top longitudinal slide feature, there is no need to reverse patient to achieve full body fluoroscopic procedures.

ATMS-44

- Smooth function of Table (i.e. High-Low, Trendelenburg, Lateral Tilt, Flex-Reflex, Chair, Longitudinal Top) can be achieved by using . the corded handset.
- Base and Column covered with 304G Stainless Steel Sheet to ensure high durability hygiene for Operation room.
- Interchangeable Head and Leg Section.

TECHNICAL SPECIFICATION

| Top Dimension | L 2150 x W 500 |
|-----------------------------|------------------|
| Height adjustment | 750 mm ~ 1050 mm |
| Kidney Elevator | 120 mm |
| Lateral Tilt | +20°/-20° |
| Trendelenburg | +25°/-25° |
| Back Section | 90°/-40° |
| Head & Leg Section | 90°/-90° |
| Power Supply | 24V DC |
| Permissible Weight Capacity | 200 Kg |

ATMS-45

OPERATION TABLE - HYDRAULIC



ATMS-47A







Available with Orthopedic attachment

ATMS-49A


Hydraulic OT Table

NST47A is single action O.T. table with improved hydraulic system provides smooth uniform movement and the speed of lowering the table is permanently set. All the surgical procedures positions can be attained through a crank. The detachable leg section provides easy lithotomy positioning. Head & leg section are interchangeable. Heavy mild base & column are covered with S.S.

TECHNICAL SPECIFICATION

| Top Dimension | L 2100 mm x W 500 mm |
|-----------------------------|----------------------|
| Height adjustment | 750 mm ~ 950 mm |
| Trendelenburg | +20° |
| Lateral Tilt | +30° |
| LegSection | 90°/-40° |
| Permissible Weight Capacity | 200 Kg |

OPERATION TABLE - C-ARM Compatible

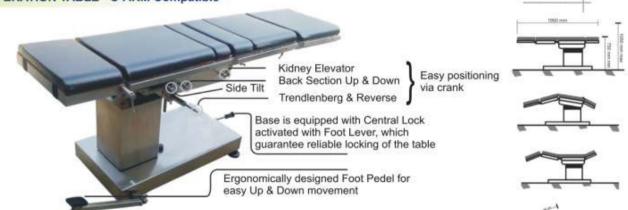

C-Arm Compatible OT Table

C-Arm Compatible five sectional operating table is fully manually operated for all kind of surgical operations and treatments (Orthopedics, Cardio, Neuro and Endoscopy), characterized with ergonomy and esthetic design. NST-49 is hydraulic operated in elevation and gear-mechanism operated in all types of different positions during surgical procedures.

TECHNICAL SPECIFICATION

| Top Dimension | L 1950~2100 mm x W 480 mm |
|-----------------------------|---------------------------|
| Height adjustment | 750 mm~1050 mm |
| Trendelenburg | +20°/-30° |
| Back Section | 90° |
| Leg Section Up & Down | 90°/40° |
| Permissible Weight Capacity | 180 Kg |



HOSPITAL OT TABLE

OPERATION TABLE - Gynaecology & Obstetrics Electric



ATMS-63A







Padded Side Support





Easy Fixing Mattress



Hand Grip can be adjusted

Gynaecology & Obstetrics Operation Table - Electric

In terms of quality, reliability and functionality NST-48 Operating Table is being acknowledged as the ideal solution for Gynaecology and Obstetrics. Due to its modular design, NST-48 can be flexibly adapted to your needs and configured to suit your exact surgical requirements.

Features :

- Design : Durable, lightweight and easy to use hand control with ergonomic shape featuring easy-to read hand control pictograms.
- Fully Laminate Mattress : MOULDED WATERPROOF SEALED BELLOW protects against infiltration of body fluids.
- · Easy to Use : Minimum Height up to 60 cm provides easy access for lady surgeon.

High Quality Mattress : A high quality 3 inches mattress enhances the adaptive capacity of the mattress.

TECHNICAL SPECIFICATION

| Top Dimension | L 1800 x W 550 mm | |
|-----------------------------|-------------------|--|
| Height adjustment | 600 mm ~ 850 mm | |
| Leg Section | +80°/-20° | |
| Trendelenburg | +20°/±2° | |
| Mattress Thickness | 60 mm | |
| Power Supply | 24V DC | |
| Permissible Weight Capacity | 300 Kg | |



Easy insertion of Drainage Basin

21

HOSPITAL OT LIGHTS

CEILING OT LIGHT SINGLE DOME SEVEN REFLECTOR



TECHNICAL SPECIFICATION

| Dome Dia | : | 70cm |
|---------------|---|---------------|
| Halogen Bulb | : | 12v - 55w x 7 |
| Action Radius | : | 160 cm |
| Field Area | : | 20cm |
| Color | : | 4200 k |
| Power | : | 220V AC/DC |
| Intensity | : | 1,00,000 lux |
| | | |

CEILING OT LIGHT DOUBLE DOME SEVEN & FOUR REFLECTOR

TECHNICAL SPECIFICATION

| Dome Dia | : | 70cm + 55cm |
|----------------------|----------|----------------------|
| Halogen Bulb | : | 12v - 55w x 11 |
| Action Radius | : | 160 cm |
| Field Area | : | 20cm |
| Color | : | 4200 k |
| Power | : | 220v ac/dc |
| Intensity | | 1,00,000 Lux + |
| | | 70,000 Lux |
| Imported heat | t observ | ving UV Filter glass |

TTMS-51

CEILING OT LIGHT SINGLE DOME



ATMS-53

TECHNICAL SPECIFICATION

| Dome Dia | : 22" |
|---------------|--------------------|
| Halogen Bulb | : 24v /150w |
| Color | : 4200 k |
| Power | : 220v AC/DC |
| Intensity | :1,10,000 Lux |
| Imported heat | observing UV Filte |
| glass | |
| | |

MOBILE OT LIGHT SINGLE DOME

ATMS-54

: 55 cms

: 4200 k

Imported heat observing UV Filter glass

: 220v AC/DC : 70,000 Lux

: 12v / 55w x 4 Nos.

TECHNICAL SPECIFICATION

Dome Dia

Intensity

Color Power

Halogen Bulb



HOSPITAL OT LIGHTS

CEILING LED TWIN LIGHT



TECHNICAL SPECIFICATION

| Lamp Head Diameter | |
|------------------------|---|
| Rated Power of LED | |
| Color Temperature | |
| Intensity/Illuminancce | : |

| 450x4 + 450x4 |
|-------------------|
| 3.2v / 1w |
| 4800 K |
| 1,50,000 lux each |

CEILING 5 REFLECTOR LED LIGHT



TECHNICAL SPECIFICATION

| Lamp Head Diameter | |
|------------------------|--|
| Rated Power of LED | |
| Color Temperature | |
| Intensity/Illuminancce | |

450x5 3.2v / 1w 4800 K

ATMS-52B

1,50,000 lux each

ATMS-52D

MOBILE 5 REFLECTOR LED LIGHT



CEILING LED TWIN DOME LIGHT

3

4

3

:

TECHNICAL SPECIFICATION

| Lamp Head Diameter | : |
|------------------------|---|
| Rated Power of LED | : |
| Color Temperature | : |
| Intensity/Illuminancce | : |

700 + 575 mm 100 w + 70w 4300K-4800 K 180K+120K lux



HOSPITAL OT APPARATUS

ATMS-55 **AUTOCLAVE VERTICAL (HIGH PRESSURE)** Print R. O TECHNICAL SPECIFICATION Capacity (in Ltr) & Size as given bellow Working Pressure Up to 15 PSI Working Temperature 121 °C to 125 °C ÷ Material Stainless Steel & Mild Steel Display Type Digital 5 Feature Fully Automatic 5

| Capacity available (in Ltr.) | 22L | 35L | 52L | 90L | 95L | 120L | 175L | 200L |
|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Diameter / Size (in Inches) | 10x18 | 12x20 | 14x22 | 16x24 | 18x24 | 18x30 | 22x30 | 22x36 |
| Electric Load Consumption | 2Kw | 2Kw | 3Kw | 4Kw | 4Kw | 4.5Kw | 5Kw | 5Kw |

PORTABLE AUTOCLAVE



ATMS-56

Pressure Cooker Type Available in SINGLE/DOUBLE DRUM

TECHNICAL SPECIFICATION

| Height x Dia Mtr. | in Inches | in Liters |
|-------------------|-----------|-----------|
| 275 x 225 mm | 11"×9" | 10 Ltrs. |
| 325 x 300 mm | 13"x12" | 21 Ltrs. |
| 350 x 300 mm | 14"×12" | 24 Ltrs. |
| 550 x 300 mm | 22"x12" | 39 Ltrs. |

SUCTION APPARATUS

TECHNICAL SPECIFICATION

- 0.5 and 0.25 H.P. Electric Motor vATMS-52Dtary Pump.
- 2 X 1.5 Ltrs. Poly Carbonate Jars with overflow device.
- Vacuum up to -700 +/- 10 mmHg.
- Free air displacement 30 ~ 35 ltrs/min.
- Noise level 50 dB +/- 03 dB.
- Power Requirement 220~230V, 50Hz, 1Phase.
- 76 mm Vacuum Gauge.
- Non Collapsible Suction Tubing.
- Bacterial filter fitted on top, Mild Steel Box & SS Top.

AEROSOL DISINFECTOR / FUMIGATOR



TECHNICAL SPECIFICATION

Aerosol Disinfector / Fumigator Splits the solution of formalin and water (30: 70) into micro particles. Due to high aerodynamic stability the formalin droplets remain suspended in the atmosphere for longer duration and because of penetrating property it ensures100% sterile germ free and zero bacterial environment.

ATMS-58







Base Side : Approx. 120Lx56Lx80H cms each Auto Locking System between trolley Move on 6" Castor **Epoxy Powder Coated**

CYLINDER TROLLEY

ATMS-41D

BEDSIDE LOCKER REVOLVING STOOL MONITOR TROLLEY











We are MSME (UDYAM) Registered



MAYA MEDICAL SOLUTION

(GSTIN NO:07GQCPM6880E1ZK) Corporate Of ce: A-3/113, UGFloor, Back Side Maharaja Agrasen Marg, , Uttam Nagar, Delhi - 110059 (India)



+91 7827001322

<u>mayamedicalsolution@gmail.com</u>

